

SIP Office Ringer

The SIP-enabled Office Ringer is perfect for small offices or cubicles for a distinct ring tone. It is a Power-over-Ethernet (PoE 802.3af), Voice-over-IP (VoIP) notification device that easily connects into existing local area networks (LANs) with a single cable connection.

The SIP Office Ringer provides a user uploadable audible ring indication when part of a ring group. The SIP Office Ringer also supports direct SIP voice paging and priority-based Multicast broadcasts.

CyberData has maintained one of the most comprehensive list of IP PBX servers certified to work with CyberData VoIP Products.

Features

- TLS 1.2, Enhanced security for IP Endpoints in a local or cloud based environment
- Drywall mounting
- Supports SRST (Survivable Remote Site Telephony) in a Cisco environment
- Streamlined case design
- Network web management and firmware download
- Network adjustable speaker volume
- Concurrent SIP and multicast paging
- Dry relay contact for auxiliary control
- Door closure and tamper alert signal
- Downloadable alert, ringtones and callout messages

Related Products:



011146 SIP Paging Server with Bell Scheduler



011288 Auxiliary RGB Strobe Kit



011393/011394 SIP Speaker



011457 SIP IP66 Outdoor Horn




Specifications

Ethernet I/F	10/100 Mbps
Protocol	SIP RFC 3261 Compatible
Power Input	PoE 802.3af compliant or +8 to +12VDC @ 1000mA Regulated Power Supply (not included)
Speaker Output	2 Watts Peak Power
On-Board Relay	1A @ 30 VDC
Payload Types	G.711 a-law, G.711μ-law, G.722, and G.729
Network Security	TLS/SSL 1.2
Operating Range	Temperature: -40° C to 55° C (-40° F to 131° F) Humidity: 5-95%, non-condensing
Storage Temperature	Temperature: -40° C to 70° C (-40° F to 158° F)
Storage Altitude	Up to 15,000 ft. (4573 m)
Dimensions*	4.53 inches [115 mm] Length 2.14 inches [54.3 mm] Width 4.53 inches [115 mm] Height
Weight	1.0 lbs. [0.45 kg]
Boxed Weight	2.0 lbs. [0.90 kg]
Compliance	CE; EMC Directive – Class A EN 55032 & EN 55024, LV Safety Directive – EN 60950-1, RoHS Compliant, FCC; Part 15 Class A, Industry Canada; ICES-3 Class A, IEEE 802.3 Compliant
Warranty	2 years limited
Part Number	011216

*Dimensions are measured from the perspective of the product being upright with the front of the product facing you.

SIP Office Ringer

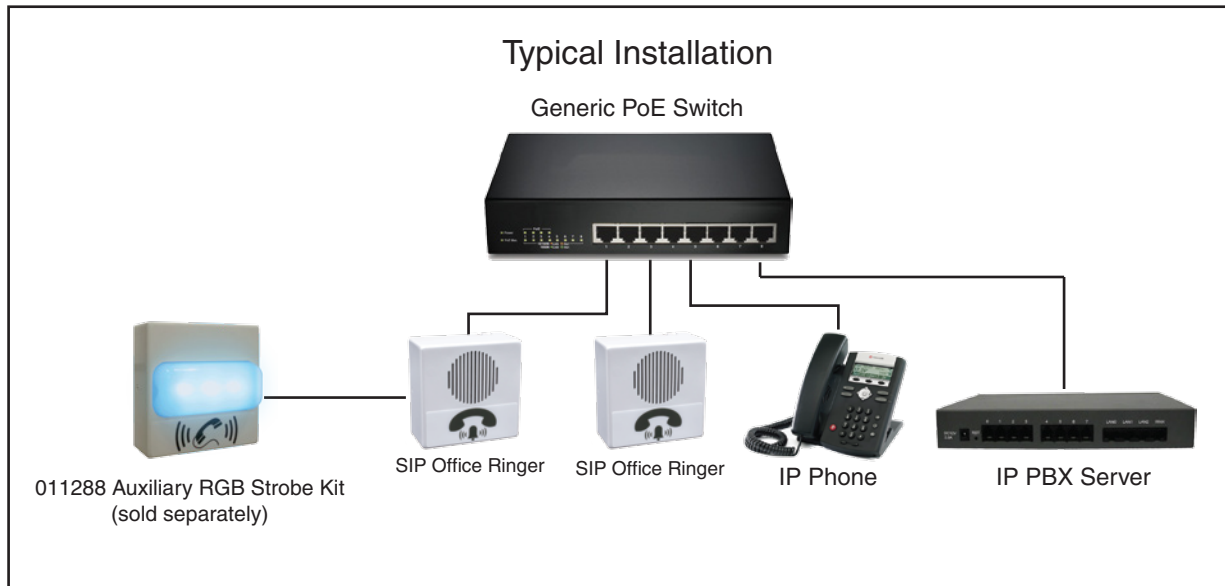

Sample Installation

