

# SIP RGB (Multi-Color) Strobe

The wall-mounted SIP RGB (Multi-Color) Strobe operates as a visual alerting device. The device can be set up as part of a ring group or page group with the Strobe engaged as notification of incoming calls or pages.

The SIP RGB (Multi-Color) Strobe may also be activated by being part of a Multicast group. When audio is detected on a specific Multicast address and port, the strobe will activate. Users can program or listen to up to 10 Multicast addresses.

Through a web page setup, you can have the SIP RGB (Multi-Color) Strobe respond to message waiting signals by blinking. When the message has been heard, the strobe stops blinking.

Multiple colors, blink rate and brightness can be selected for each of the different activation methods

Users may also use CyberData's HTTP command set to directly access the strobe's functions.

CyberData has maintained one of the most comprehensive list of IP PBX servers certified to work with CyberData VoIP Products.

## Features

- Meets ADA requirements for telephony signaling and notification
- SIP and Multicast activation
- Cisco SRST support
- Event-controlled relay
- Tamper sensor
- Web-based setup

## Use areas include:

- Sales and support mailbox indication
- Classrooms
- Banks or financial institutions
- Court rooms
- Manufacturing warehouses
- Office
- Indoor only

## Related Products:



011146 SIP Paging Server  
with Bell Scheduler




## Specifications

Ethernet I/F	10/100 Mbps
Protocol	SIP RFC 3261 Compatible
Power Input	PoE 802.3af compliant or +8 to +12VDC @ 1000mA Regulated Power Supply (not included)
Flash rate	5 user-defined scenes
LED MTBF	100,000 Hours
On-Board Relay	1A @ 30 VDC
Payload Types	G.711 a-law, G.711μ-law, and G.722
Operating Range	Temperature: -40° C to 55° C (-40° F to 131° F) Humidity: 5-95%, non-condensing
Storage Temperature	-40° C to 70° C (-40° F to 158° F)
Storage Altitude	Up to 15,000 ft. (4573 m)
Dimensions*	4.5 inches [115 mm] Length 2.1 inches [55 mm] Width 4.5 inches [115 mm] Height
Weight	1.0 lbs. [0.45 kg]
Boxed Weight	2.0 lbs. [0.90 kg]
Compliance	CE; EMC Directive – Class A EN 55032 & EN 55024, LV Safety Directive – EN 60950-1, RoHS Compliant, FCC; Part 15 Class A, Industry Canada; ICES-3 Class A, IEEE 802.3 Compliant
Warranty	2 Years Limited
Part Number	011376

\*Dimensions are measured from the perspective of the product being upright with the front of the product facing you.

# SIP RGB (Multi-Color) Strobe

## Typical Installation

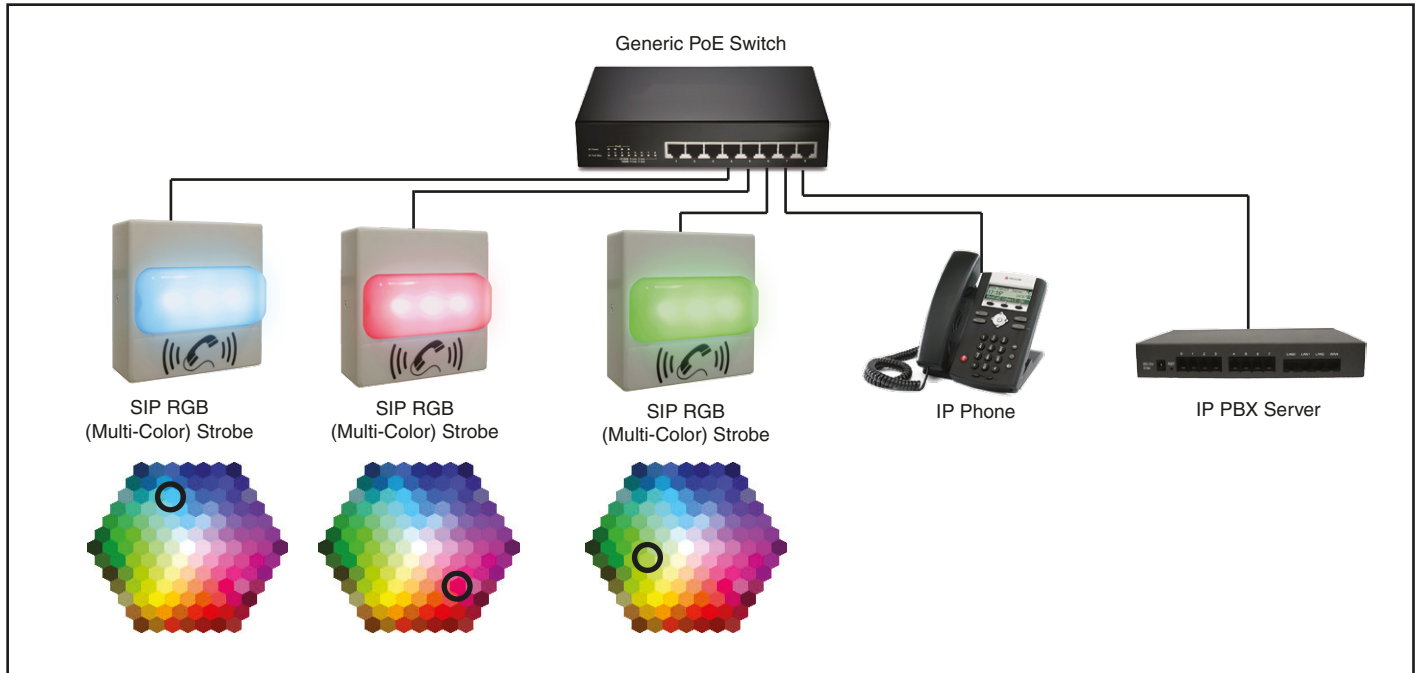

## Mounting Options

