
Overall Dimensions

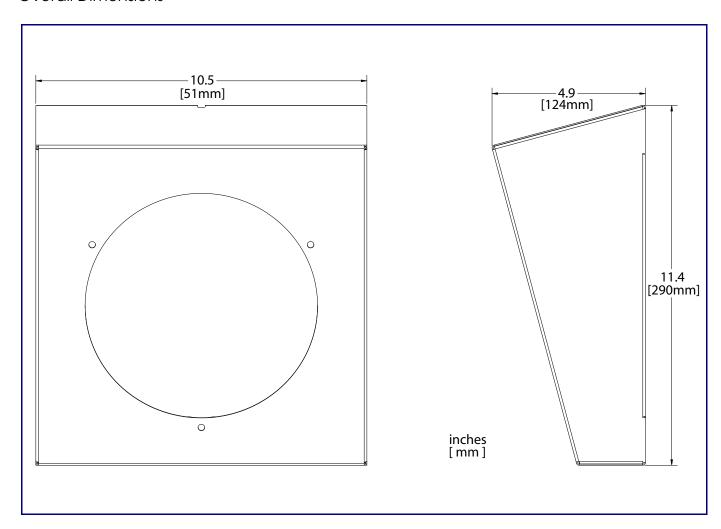

Contacting CyberData

Monterey, CA 93940, USA

Corporate Headquarters Sales: (831) 373-2601 ext. 334 Support: 831-373-2601 ext. 333

CyberData Corporation Web: http://www.cyberdata.net/support/contactsupportvoip.html
2555 Garden Road BMA Dept: (831) 373-2601 ext. 136

RMA Dept: (831) 373-2601 ext. 136 Email: RMA@CyberData.net

RMA Status: http://www.cyberdata.net/support/rmastatus.html

Phone: 831-373-2601 Fax: 831-373-4193 Warranty information is available at:

www.CyberData.net Web: http://www.cyberdata.net/support/warranty/index.html



Installation Quick Reference

Wall Mount Adaptor for Indoor Paging Speakers


011108*, RAL 9002, Gray White, Standard 011109, RAL 9003, Signal White, Optional


*Replaces the 010882 number.

The Wall Mount Adaptor for Indoor Paging Speakers is an adapter that is built for a CyberData Ceiling speaker.




Wall Mount Adapter Parts

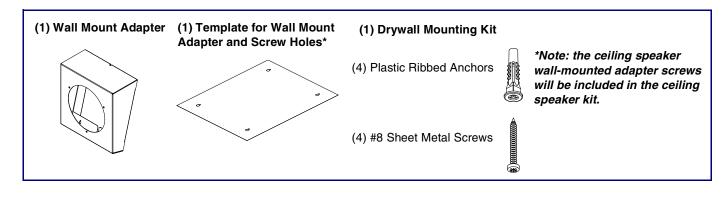

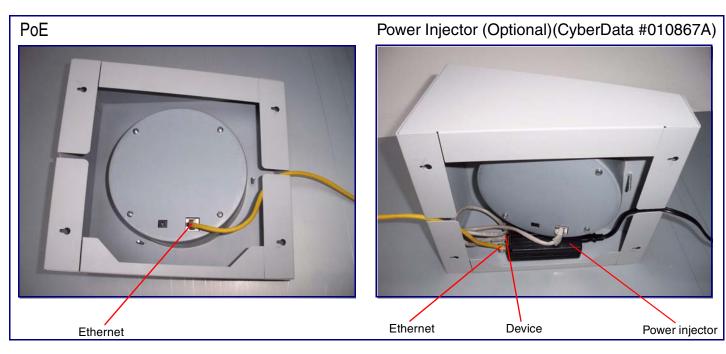

Mounting the Speaker

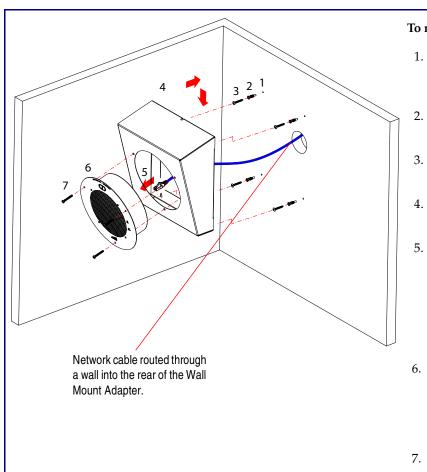

To mount a Wall Mount Adapter:

- 1. Use the **TEMPLATE** on the back of this document to drill four holes in the wall for the anchors and screws.
- 2. Place the four **PLASTIC RIBBED ANCHORS** in the holes you prepared.
- 3. Position the **WALL MOUNT ADAPTER** over the holes.
- 4. Use the four **#8 SHEET METAL SCREWS** to secure the **WALL MOUNT ADAPTER**.
- 5. Plug the Ethernet cable into the **IP SPEAKER ASSEMBLY**. The yellow light verifies the network connection.

Note: You can route the Ethernet cable through the back or through the slots at the top or bottom of the **WALL MOUNT ADAPTER**.

- 6. Position the IP SPEAKER ASSEMBLY in the WALL MOUNT ADAPTER so that the IP SPEAKER ASSEMBLY screw holes align with the mounting holes in the WALL MOUNT ADAPTER.
- 7. Use three 8-32 x 1 1/4" MOUNTING SCREWS to secure the IP SPEAKER ASSEMBLY to the WALL MOUNT ADAPTER.

10" [254mm]



